


Safety & Installation Instructions

These instructions are provided for your safety in order to prevent the risk of Fire, Electric shock or Injury. It is vitally important that they are read in their entirety before installing your fitting. Please retain for future reference.

1. If you are in any doubt consult a qualified electrician as to the installation of the fitting. Install in accordance with current IEE wiring regulations. It is recommended that this fitting is installed by a qualified electrician.
2. Ensure that the electrical supply is OFF. Disconnect the electrical supply at the fuse-board.
3. If removing an existing fitting first, note all wiring connections: record which of the house wires is connected to the live, neutral and earth terminals.
4. Carefully identify where the supply cable is (and check there are no other cables in the area) to avoid damage to concealed wiring during installation.
5. Position the light where desired ensuring that there is suitable support adjacent to where you will connect to the house supply and mark position of fixing holes, before drilling appropriate holes as below.
6.
 - a. Brick or masonry: Drill holes into which the wall plugs tightly fit, then insert wall plugs.
 - b. Wood: No hole necessary (unless small pilot hole required), screws can be screwed directly into the timber.
 - c. Plaster/Cavity: Special cavity wall fittings are required, rather than provided fixings. These are widely available from good hardware or DIY store and should come with their own instructions that must be followed. It may be easier to relocate the fitting so that you screw directly into a timber joist or beam.
7. Support the fitting so that no strain is applied to the wiring when making the electrical connections. If necessary get a colleague to help.
8. Electrical connection: this light fitting must be earthed. Make connections following the diagram below, using the terminal block provided. A small flat-head screw driver is required.



9. Double check all the connections are secure and that no loose strands of wire are left out of the connector. Ensure the lid of the terminal block is closed securely after making connections.
10. Check that no wires are trapped behind or within the fitting and complete the installation, referring to the Installation diagram inside.
11. Fit the correct type and wattage of lamp (or less). Be careful not to overtighten the lamp.
12. Switch on at the fuse-board. Your light fitting is now ready for use.

Other Important Information

Switch off at mains before changing lamp(s). Never fit a lamp of greater wattage than recommended. Ensure children do not play with the light fitting. Dispose of old lamps carefully. Never leave a fitting without a lamp in position (or someone can accidentally touch the contacts). Adjust fitting only when power to the fitting is off and has been left to cool. If the electrical flex or electrical components become damaged at any point, power to the fitting should be disconnected immediately and not operated until the damaged parts are fixed/replaced. For use in dry, indoor environment only. Ensure the fitting does not come into contact with any liquids.

Cleaning and Maintenance

Metal finishes should only be cleaned with a soft, dry cloth. Do not use polishes or abrasives. Glass can be cleaned by hand, using a soft damp cloth with a diluted mild detergent (nonabrasive) or suitable glass cleaner if necessary. Switch off power to the fitting before cleaning. Spare parts are available for this product, please contact us on the details below.

Established in 1990, Original BTC manufactures relaxed, familiar lighting for traditional and contemporary homes. All products are hand-assembled in Oxford from high quality components, produced in the UK.


ORIGINALBTC.COM
+44 (0)1993 882 251
UNIT 21 / 22 AVENUE ONE, STATION LANE, WITNEY, OX28 4XZ, ENGLAND




Deck Lights

7125 - 7244

Instruction Manual

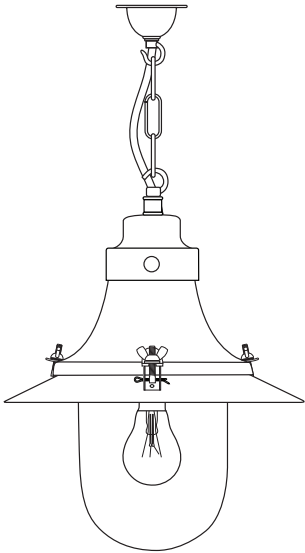

Small Decklight
7125

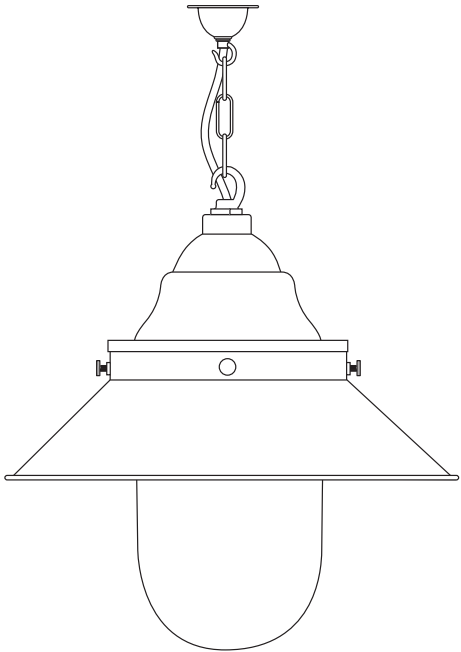

Ship's Large Deck Light
7244

ORIGINAL BTC
BRITISH LIGHTING MANUFACTURERS
LONDON • NEW YORK • PARIS



Deck Lights

7125 - 7244




230V ac 50Hz | IP20


7125

Small Decklight

7244

Ship's Large Deck Light

| LAMP GUIDANCE | | | | | | | |
|--|---|---|---|--------------|---|--------------|--------------|
| PRODUCT | BASE | SHAPE | | TYPE* | | WATTAGE** | |
| (a) 7125 |  |  |  | INCANDESCENT | ✓ | 100W MAX (a) | 150W MAX (b) |
| | | | | CFL | ✓ | 20W | 20W |
| (b) 7244 | | | | ECO-HALOGEN | ✓ | 70W | 70W |
| | | | | LED | ✓ | 18W | 18W |
| * Warm white (2700k) low energy lamps recommended. | | | | | | | |
| ** Wattage value provided as a guide to suitable lamps. Lower wattage than stated may be used. | | | | | | | |

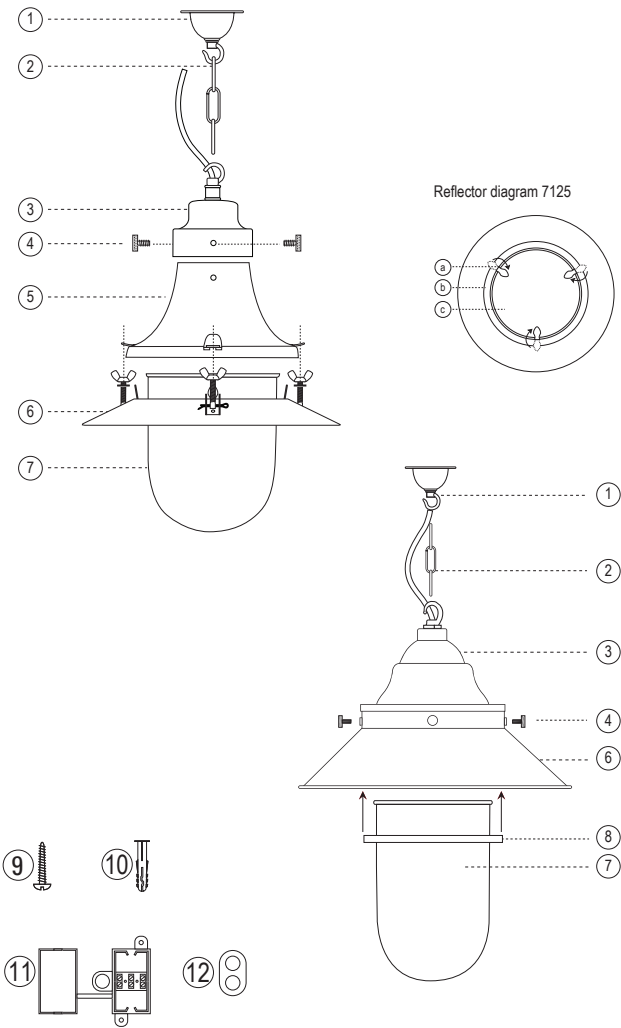

- Contents
- 1 - Ceiling hook

2 - Chain

3 - Top Spinning

4 - 3 x Gallery Screws*

5 - Middle Spinning (7125)

6 - Reflector

7 - Well Glass

8 - Glass Ring

9 - 2 x fixing screws

10 - 2 x rawl plugs

11 - Connector block

12 - 2-hole cord grip

- Required for Installation
- Screwdriver, flat-head

- Small screwdriver, flat-head

- Drill (if holes are required)


*Remove gallery screws and glass ring before inserting bulb and well glass.

a - Tabs

b - Reflector

c - Well Glass

Installation Diagram

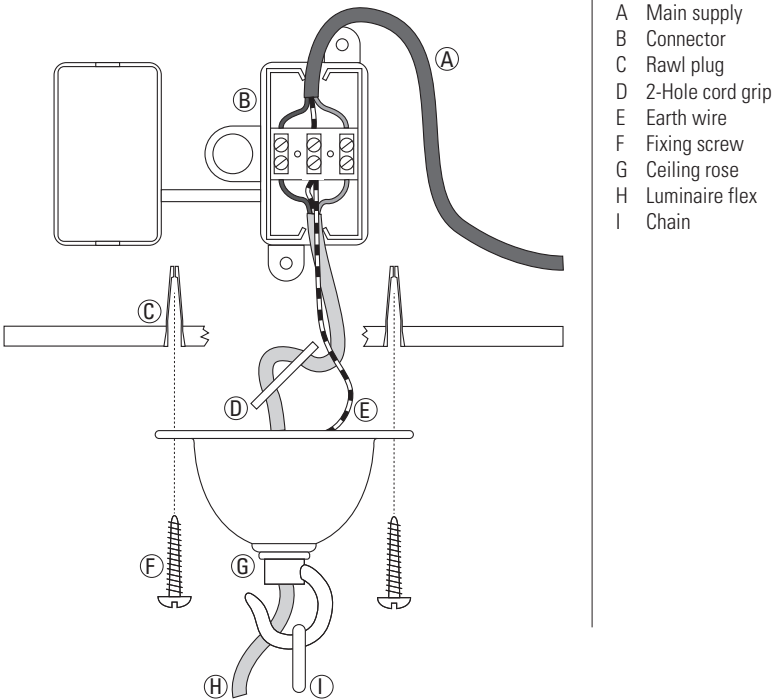

PLEASE READ THE INSTRUCTIONS ON THE REVERSE BEFORE YOU BEGIN INSTALLING YOUR LIGHT

Installation and Assembly Instructions

- Assembly Instructions

Check that the middle spinning(4) is connected to the top spinning(2). If it isn't, use the three gallery screws(4) to attach the middle to the top spinning- lining up the holes on each.

Place well glass through the hole in the reflector,

- Secure glass in place by folding metal tabs(on the inside of the reflector) over the top of the glass rim.

- Having inserted light bulb, use the wing nuts connected to the bolts to attach the reflector to the metal tabs protruding from the middle spinning and secure by tightening once in place.

To change light bulb, loosen two of the wing nuts- leaving the third one to act as a hinge and open the relector/glass enough to allow the old bulb to removed and the new one to be inserted. Close the reflector/glass and tighten the wing nuts to secure.
- Hanging Instructions - read in conjunction with instructions overleaf

- Determine the desired drop of the light.

- To shorten the cable, use wire cutters before removing 30mm of outer jacket and 10mm of inner insulation. Take care not to damage the inner wiring.

- Use bolt cutters to shorten the chain. The chain must be shorter than the cable.

- Feed the cable from the light though the ceiling rose, before feeding it though the 2-hole cord grip.

- Attach the chain to the hook on top of the shade and at the bottom of the ceiling rose.

- Your light is now ready to use.