

Flat

Design by Ichiro Iwasaki.

Reference

5922.

Application

Ceiling Lamps

Installation type

Surface

Description

Flat is a large ceiling lamp composed of horizontal discs at various heights that create planes of reflected light. The plates are self-illuminated by reflected light. The Flat ceiling light has a strong graphic quality, combining structure and functionality.

Diffuser

Polycarbonate diffuser

Materials


Ceiling rose: Steel
Reflector: Aluminum
Body: Steel
Head: Aluminium

Finish

5922-10 White (NCS S 0300-N)

5922-71 White, Green L1, Grey L1 (NCS S 0300-N, NCS S 4005-G80Y, NCS S 1000-N)

Sketch

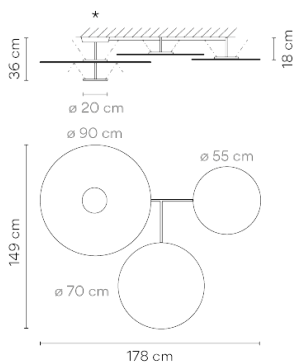

Electrical characteristics

4 x LED PLATE 25W 700mA



Total 100.0 W



VIBIA



Light source: 2700K CRI >90 13920 lm 139.2 lm/W

Fixture: 2900 lm 0 lm/W

Driver included: CC - Constant Current 700 mA 110~240V 50/60Hz

Electronic dimming: DALI 1-10V Push

Optional dimming: Casambi

Physical characteristics

1 Box / 0.00 x 0.00 x 0.00 m. / Vol. 0.6216 m³ /

Gross weight 26.6 kg. / Net weight 20.0 kg.


Installation and assembly

Please, see the installation manual

Light distribution

Indirect lighting

Lamp that emits an upward or backward beam that is reflected by the ceiling or wall.



Photometric data

Efficiency : 90.66 lm/W

Coordinate system : CG

Total flux : 9863.64 lm

Maximum value : 3196.80 cd


Light position : C=0.00 G=180.00

Symmetry on the planes : Double symmetrical

Isolux : floor

Light position :

X=0.00m Y=0.00m Z=2.50m

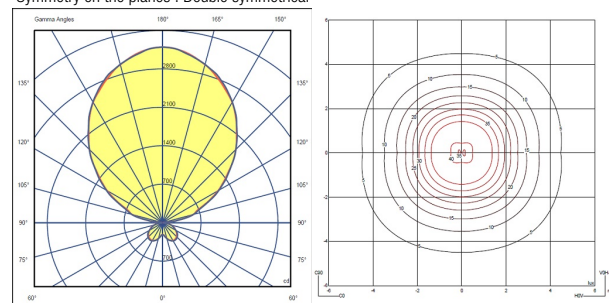

Certificates

