

Safety Instructions

These instructions are provided for your safety in order to prevent the risk of Fire, Electric shock or Injury. Please retain for future reference. When fitting is in operation, some parts will become hot; take care when using/handling.

- Ensure the lamp type and max wattage is followed- do not exceed. Take care not to overtighten lamp.
- Do not touch the lamp (bulb) or lamp holder while in operation, as both become very hot.
- Turn off and unplug fitting, leaving lamp to cool before changing lamp. Dispose of old lamps carefully.
- Adjust light fitting only when power to the fitting is off and has been left to cool.
- Never leave a fitting without a lamp in position.
- Keep light fitting away from combustible materials such as soft furnishings.
- Ensure children do not play with the light fitting.
- Ensure the light is positioned on a solid, level and non-slip surface and make sure the position of the cable does not pose a trip hazard.
- If the electrical flex or electrical components become damaged at any point, the fitting must be unplugged from the power supply immediately and not operated until the damaged parts are fixed/replaced.
- For use in a dry, indoor environment only. Ensure the fitting does not come into contact with any liquids.

Cleaning and Maintenance

Metal finishes should only be cleaned with a soft, dry cloth. Do not use polishes or abrasives. Switch off power to the fitting before cleaning. Spare parts are available for this product, please see contact details on the reverse.

Other Informations

Switch off at mains before changing the light bulbs. Never fit a bulb of greater wattage than recommended. Children should be discouraged from playing with light fittings. Dispose of old bulbs carefully. Never leave a fitting without a bulb in position (or someone can accidentally touch the contacts). Do not mount the fitting on a damp surface such as newly painted or plastered areas as this may cause discolouration of the finish. Metal finishes should only be cleaned with a soft, dry cloth. Do not use polishes or abrasives. Retain for future reference.

Established in 1990, Original BTC manufactures relaxed, familiar lighting for traditional and contemporary homes. All products are hand-assembled in Oxford from high quality components, produced in the UK.


ORIGINALBTC.COM
+44 (0)1993 882 251
UNIT 21 / 22 AVENUE ONE, STATION LANE, WITNEY, OX28 4XZ, ENGLAND



Doma, Floor & Table Light

FT411 - FF412

Instruction Manual

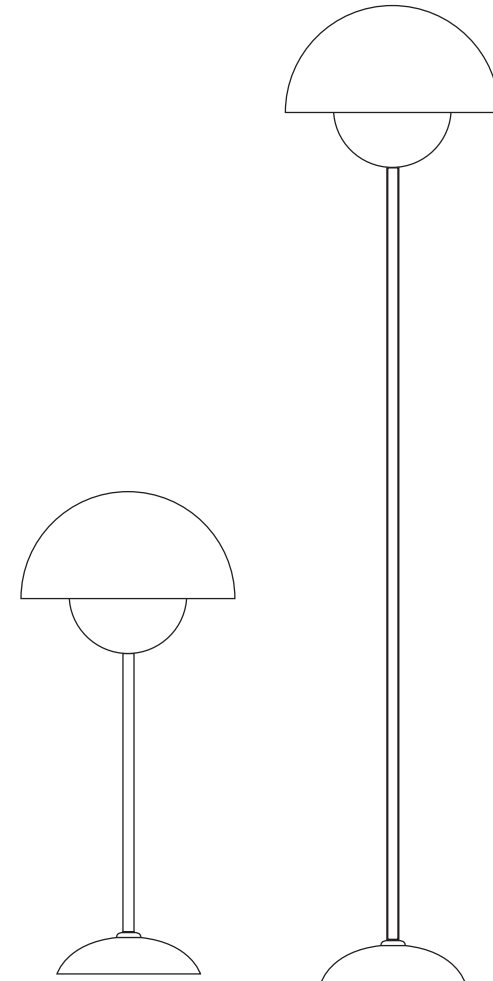

Doma Table Light
FT411

Doma Floor Light
FF412




ORIGINAL BTC
BRITISH LIGHTING MANUFACTURERS
LONDON - NEW YORK - PARIS



Doma, Floor & Table Light FT411 - FF412 | 230V ac 50Hz | IP20


FT411 Doma Table Light

FF412 Doma Floor Light

LAMP GUIDANCE				
BASE	SHAPE	TYPE*	WATTAGE**	
 E27	 GLS	 BALL	INCANDESCENT ✓	60W MAX
			CFL ✓	15W
			ECO-HALOGEN ✗	n/a
			LED ✓	12W

* Warm white (2700k) low energy lamps recommended.
 ** Wattage value provided as a guide to suitable lamps. Lower wattage than stated may be used.

PLEASE READ THE INSTRUCTIONS ON THE REVERSE BEFORE YOU BEGIN INSTALLING YOUR LIGHT

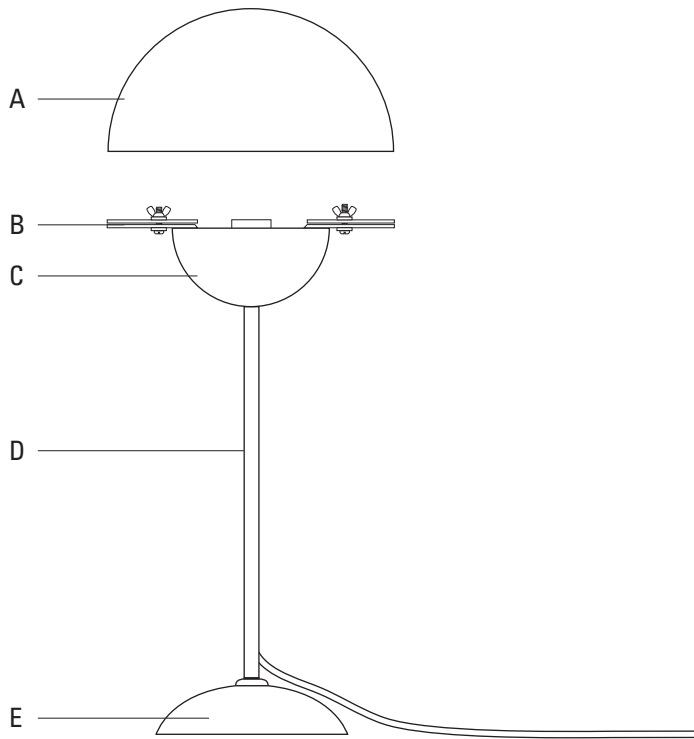


Contents

- A - Doma Shade
- B - Support Bracket/Fixing tabs
- C - Shade Base
- D - Stem
- E - Base


Installation and Assembly Instructions

Please refer to diagrams

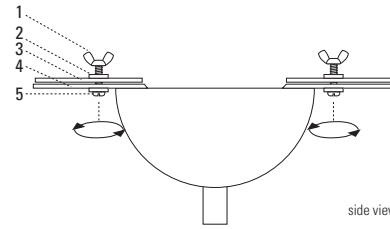


STEP 1

Loosen screws (5) from wingnuts (1). This will loosen the fixing tabs (3) from the support bracket (4)

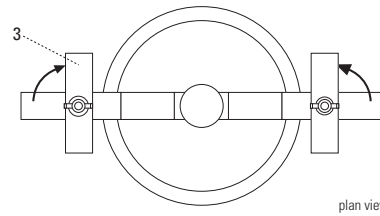

STEP 2


Turn the fixing tabs (3) 90 degrees



STEP 3

- Place the doma shade (6) on the support bracket (4), so the rim of the shade rests on the bracket
- Ensure each side is evenly supported by the bracket and the shade is supported along its centre line.

ENSURE DOMA SHADE IS SUPPORTED

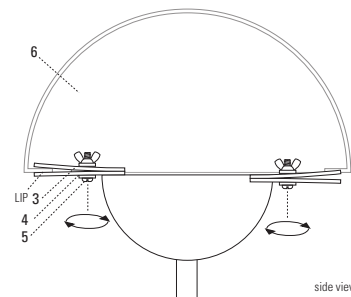

STEP 4:

- Turn the fixing tabs so they rest on the inside of the LIP of the shade (6)
- Secure the fixing tabs (3) to the support bracket (4), with shade in place, by tightening the screws with the wing nuts. A flat head screwdriver may be useful. **DO NOT OVERTIGHTEN SCREWS**
- CHECK the shade is securely fixed to the bracket