


These instructions are provided for your safety in order to prevent the risk of Fire, Electric shock or Injury. It is vitally important that they are read in their entirety before installing your fitting. Please retain for future reference.

1. If you are in any doubt consult a qualified electrician as to the installation of the fitting. Install in accordance with current IEE wiring regulations. It is recommended that this fitting is installed by a qualified electrician.
2. Ensure that the electrical supply is OFF. Disconnect the electrical supply at the fuse-board.
3. If removing an existing fitting first, note all wiring connections: record which of the house wires is connected to the live, neutral and earth terminals.
4. Carefully identify where the supply cable is (and check there are no other cables in the area) to avoid damage to concealed wiring during installation.
5. Position the light where desired ensuring that there is suitable support adjacent to where you will connect to the house supply and mark position of fixing holes, before drilling appropriate holes as below.
 - a. Brick or masonry: Drill holes into which the wall plugs tightly fit, then insert wall plugs.
 - b. Wood: No hole necessary (unless small pilot hole required), screws can be screwed directly into the timber.
 - c. Plaster/Cavity: Special cavity wall fittings are required, rather than provided fixings. These are widely available from good hardware or DIY store and should come with their own instructions that must be followed. It may be easier to relocate the fitting so that you screw directly into a timber joist or beam.
7. Once desired drop determined, adjust the flex length accordingly. Consult an electrician if in any doubt.
8. Support the fitting so that no strain is applied to the wiring when making the electrical connections. If necessary get a colleague to help.
9. Electrical connection: this light fitting must be earthed. Make connections using the connector block, following the diagram below. A small flat-head screwdriver is required.

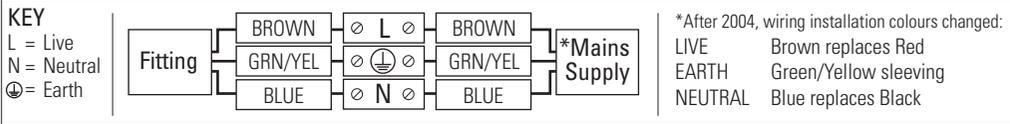


10. Double check all the connections are secure and that no loose strands of wire are left out of the connector.
11. Check that no wires are trapped behind or within the fitting and complete the installation, see hanging instructions inside.
12. Fit the correct type and wattage of lamp (or less). Be careful not to overtighten the lamp.
13. Switch on at the fuse-board. Your light fitting is now ready for use.

Other Important Information

Switch off at mains before changing lamp(s). Never fit a lamp of greater wattage than recommended. Ensure children do not play with the light fitting. Dispose of old lamps carefully. Never leave a fitting without a lamp in position (or someone can accidentally touch the contacts). Adjust fitting only when power to the fitting is off and has been left to cool. If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard. For use in a dry, indoor environment only. Ensure the fitting does not come into contact with any liquids.

Cleaning and Maintenance

Metal finishes should only be cleaned with a soft, dry cloth. Do not use polishes or abrasives. Glass can be cleaned by hand, using a soft cloth, or glass cleaner if necessary - avoid contact with metal finishes. Switch off power to the fitting before cleaning. Spare parts are available for this product; please contact us using the details below.

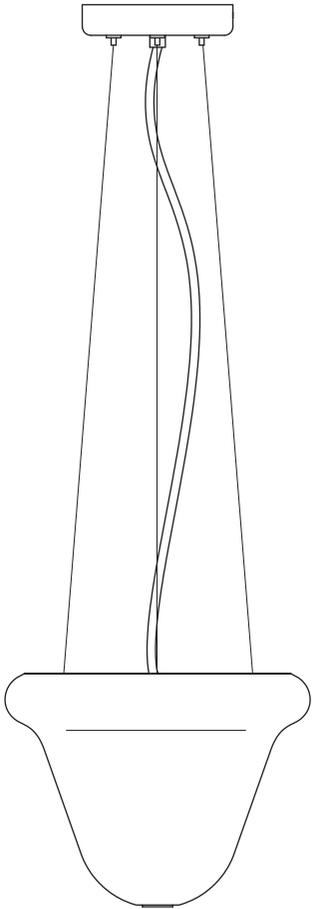

Established in 1990, Original BTC manufactures relaxed, familiar lighting for traditional and contemporary homes. All products are hand-assembled in Oxfordshire from high quality components, produced in the UK.

ORIGINALBTC.COM
+44 (0)1993 882 251
UNIT 21 / 22 AVENUE ONE, STATION LANE, WITNEY, OX28 4XZ, ENGLAND



ORIGINAL BTC



BUCHANAN STUDIO

Neo Pendant Light


| 230V AC 50Hz | IP20

FP7200P/P Neo Strawberry Pendant Light
 FP7200P/B Neo Chocolate Pendant Light
 FP7200P/W Neo Vanilla Pendant Light


LAMP GUIDANCE Neo Pendant					
BASE	SHAPE	TYPE*	WATTAGE**		
 E27	 GLS  BALL	INCANDESCENT	x	N/A	
		CFL	x	N/A	
		ECO-HALOGEN	x	N/A	
		LED	✓	10W	

* Warm white (2700k) low energy lamps recommended.
 ** Wattage value provided as a guide to suitable lamps. Lower wattage than stated may be used.

Installation Diagram

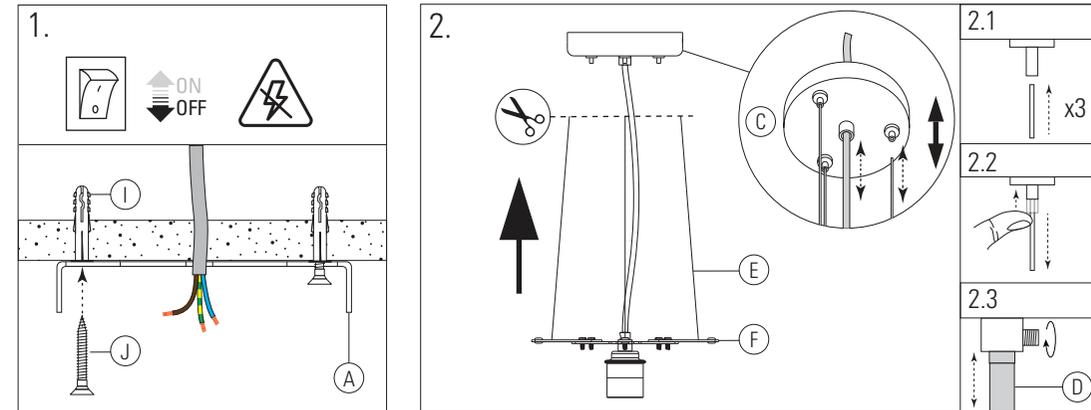

Contents

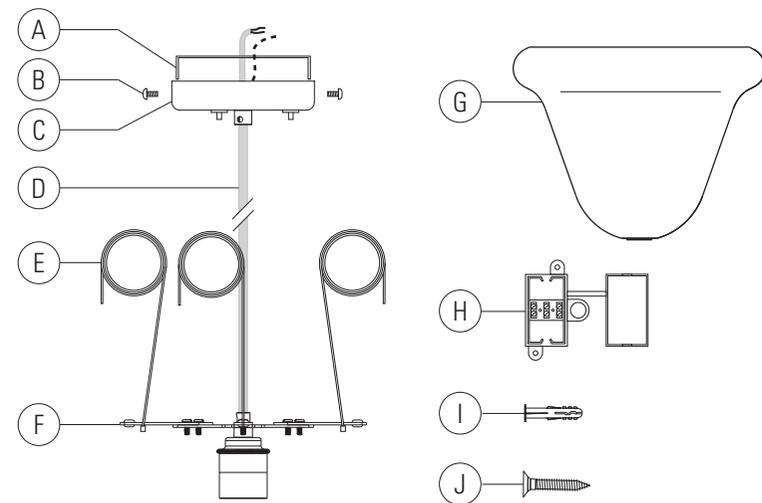

Contents


- A Ceiling bracket
- B Ceiling rose screws (x2)
- C Ceiling rose
- D Braided cable
- E Suspension wire (x3)
- F Pendant frame
- G Shade
- H Connector block
- I Rawl plug (x2)
- J Screws (x2)

Tools Required

- Cross head screwdriver
- Small flat head screwdriver
- Drill (if holes are required)

Installation Instructions

- Step 1.** Attach the ceiling bracket (A) to the ceiling using appropriate fixings: see points 1 to 6 on the back page.
- Step 2.** Determine drop length and position the ceiling rose (C) on the braided cable (D) and steel suspension wire (E) as shown. Cut braided cable (D), if necessary, and adjust the length of suspension wire according to fig. (2.1, 2.2). Tighten the black grub screw on the braided cable (fig. 2.3) - don't overtighten. The weight of the fitting is designed to be taken by the steel suspension wire (E), so the braided cable (D) MUST be longer than the suspension wire. Ensure you leave sufficient cable slack (10cm+) to wire the fitting.
- Step 3a/b.** Prepare the supply and braided cable (D) as shown: Make electrical connections, including all earth connections, with the supplied terminal block (H): see wiring details in Safety and Installation Instructions overleaf. Be sure to firmly close the lid. Attach the ceiling rose (C) cover onto the installed ceiling bracket using the two ceiling rose screws (B) supplied. Be sure to support the weight of the fitting when securing the screws. You will require the assistance of a second person.
- Step 4.** Adjust the pendant frame arms (F) by loosening the brass screws allowing the arms to slide towards the lampholder. Screw in the light bulb (not supplied).
- Step 5.** Mount the shade (G) upside-down to the suspended pendant frame (F) and extend the frame arms, re-tightening the brass screws. The shade (G) should rest on the white rubber grippers at the end of each arm on the pendant frame (F).

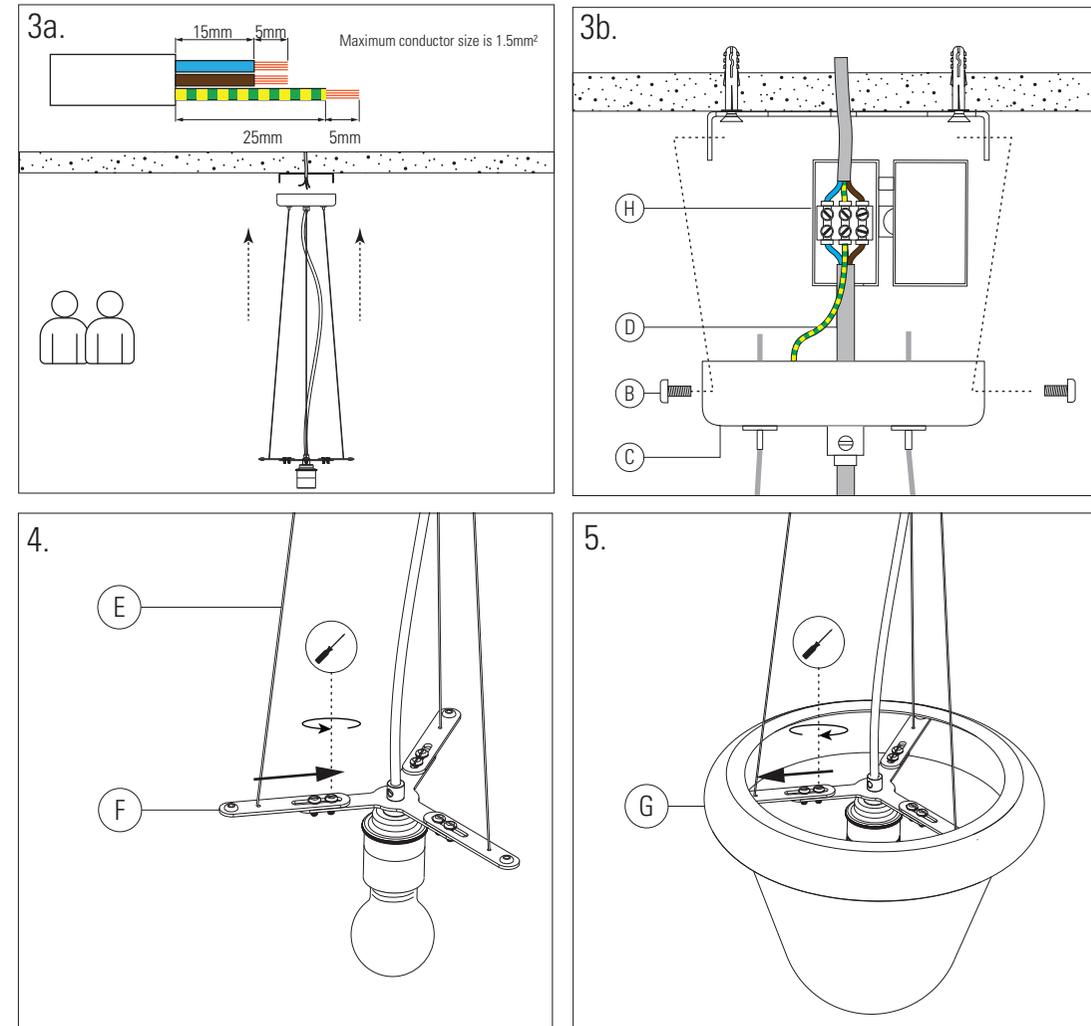

PLEASE READ THE INSTRUCTIONS ON THE BACK PAGE BEFORE YOU BEGIN INSTALLING YOUR LIGHT