


# Safety & Installation Instructions

These instructions are provided for your safety in order to prevent the risk of Fire, Electric shock or Injury. It is vitally important that they are read in their entirety before installing your fitting. Please retain for future reference.

1. If you are in any doubt consult a qualified electrician as to the installation of the fitting. Install in accordance with current IEE wiring regulations. It is recommended that this fitting is installed by a qualified electrician.
2. Ensure that the electrical supply is OFF. Disconnect the electrical supply at the fuse-board.
3. If removing an existing fitting first, note all wiring connections: record which of the house wires is connected to the live, neutral and earth terminals.
4. Carefully identify where the supply cable is (and check there are no other cables in the area) to avoid damage to concealed wiring during installation.
5. Position the light where desired ensuring that there is suitable support adjacent to where you will connect to the house supply and mark position of fixing holes, before drilling appropriate holes as below.
6.
  - a. Brick or masonry: Drill holes into which the wall plugs tightly fit, then insert wall plugs.
  - b. Wood: No hole necessary (unless small pilot hole required), screws can be screwed directly into the timber.
  - c. Plaster/Cavity: Special cavity wall fittings are required, rather than provided fixings. These are widely available from good hardware or DIY store and should come with their own instructions that must be followed. It may be easier to relocate the fitting so that you screw directly into a timber joist or beam.
7. Support the fitting so that no strain is applied to the wiring when making the electrical connections. If necessary get a colleague to help.
8. Electrical connection: this light fitting is double insulated, DO NOT connect to an Earth wire or terminal. Make connections using the connector block, following the diagram below. A small flat-head screwdriver is required.

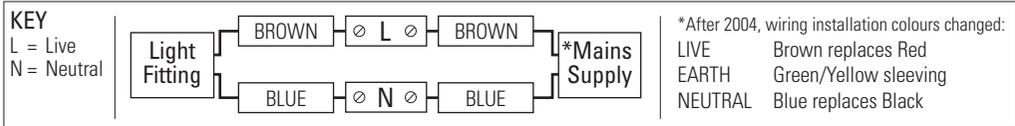

9. Double check all the connections are secure and that no loose strands of wire are left out of the connector, then close the lid of the connector block.
10. Check that no wires are trapped behind or within the fitting and complete the installation, referring to the Installation diagram inside.
11. Fit the correct type and wattage of lamp (or less). Be careful not to overtighten the lamp.
12. Switch on at the fuse-board. Your light fitting is now ready for use.


## Other Important Information

Switch off at mains before changing lamp(s). Never fit a lamp of greater wattage than recommended. Ensure children do not play with the light fitting. Dispose of old lamps carefully. Never leave a fitting without a lamp in position (or someone can accidentally touch the contacts). Adjust fitting only when power to the fitting is off and has been left to cool. If the electrical flex or electrical components become damaged at any point, power to the fitting should be disconnected immediately and not operated until the damaged parts are fixed/replaced. For use in a dry, indoor environment only. Ensure the fitting does not come into contact with any liquids.

## Cleaning and Maintenance

Metal finishes should only be cleaned with a soft, dry cloth. Do not use polishes or abrasives. Switch off power to the fitting before cleaning.

# Ginger Wall Light Instruction Manual

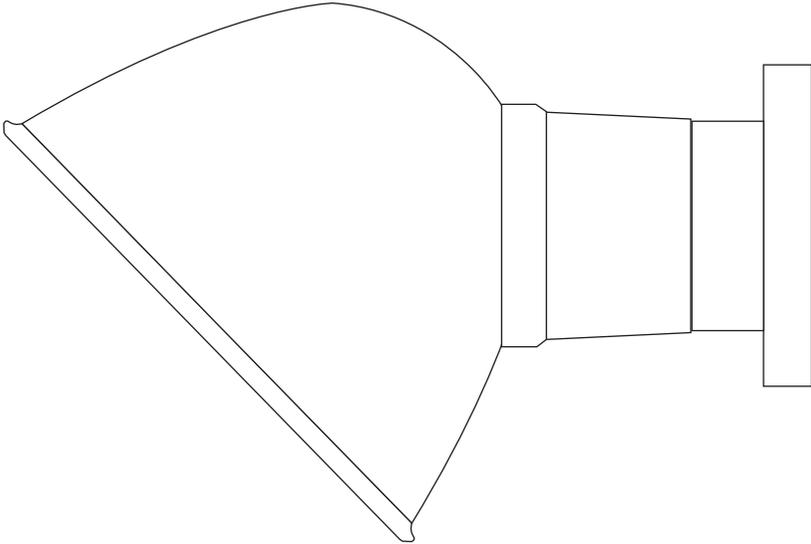

Established in 1990, Original BTC manufactures relaxed, familiar lighting for traditional and contemporary homes. All products are hand-assembled in Oxford from high quality components, produced in the UK.

ORIGINALBTC.COM  
+44 (0)1993 882 251  
UNIT 21 / 22 AVENUE ONE, STATION LANE, WITNEY, OX28 4XZ, ENGLAND



**ORIGINAL BTC**  
BRITISH LIGHTING MANUFACTURERS  
LONDON - NEW YORK - PARIS



# Ginger Wall Light


| 230V ac 50Hz | IP20 |

## FW170 Ginger Bracket Wall

The nautically influenced Ginger range includes wall, table and floor lights with a pleasingly rounded shade. The shade can rotate on its base, to allow a variety of different light effects to be created.

LAMP GUIDANCE Ginger			
BASE	SHAPE	TYPE*	WATTAGE**
 E27	 GLS  BALL	INCANDESCENT ✓	40W MAX
		CFL ✓	11W
		ECO-HALOGEN ✗	n/a
		LED ✓	7W

\* Warm white (2700k) low energy lamps recommended.  
 \*\* Wattage value provided as a guide to suitable lamps. Lower wattage than stated may be used.

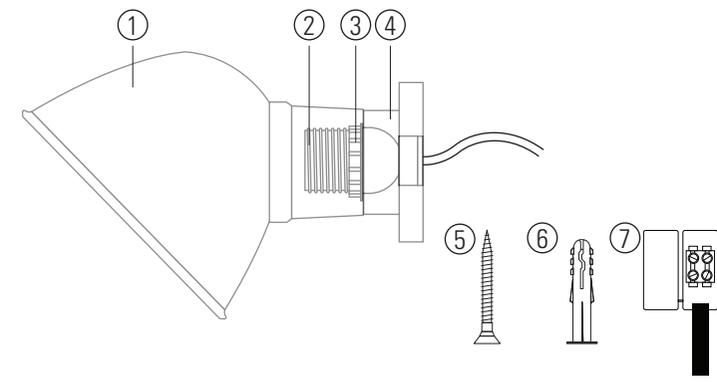

- Contents**
- 1 - Shade
  - 2 - Lampholder/Bracket
  - 3 - Shade ring
  - 4 - Backplate
  - 5 - 2 x fixing screws
  - 6 - 2 x rawl plugs
  - 7 - Insulated connector block
- Required for Installation**
- Screwdriver, cross-head
  - Small screwdriver, flat-head
  - Drill (if holes are required)

PLEASE READ THE INSTRUCTIONS ON THE REVERSE BEFORE YOU BEGIN INSTALLING YOUR LIGHT

### Installation and Assembly Instructions

Refer to diagram opposite.

#### STEP 1

Undo the shade ring (B) that secures the shade to the base.

#### STEP 2

Mark fixing holes through bracket (D) before drilling holes, see point 5 and 6 on reverse.

#### STEP 3

Make electrical connection, see points 7 to 10 on reverse page then screw bracket to wall.





#### STEP 4

a - Place backplate over lampholder (H) and fixing bracket

b - Position shade onto backplate

c - Secure in position with shade ring (B)

### Installation Diagram

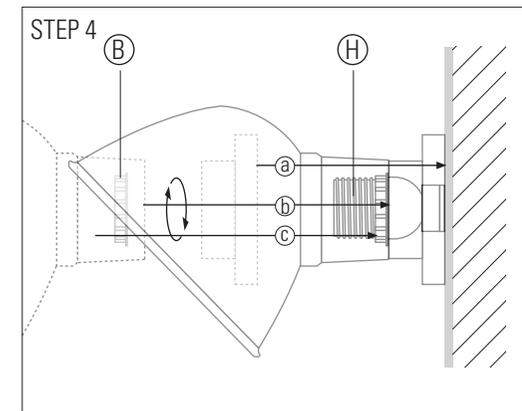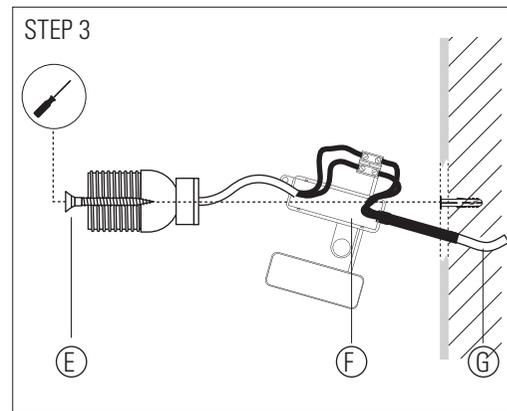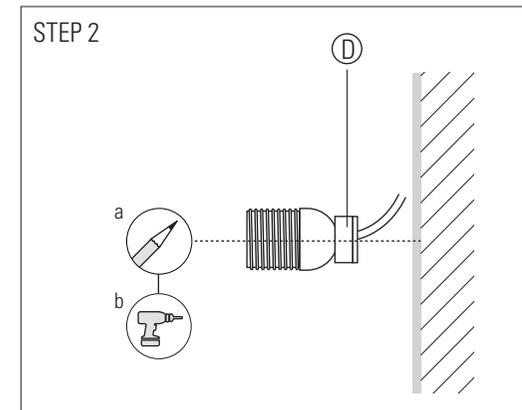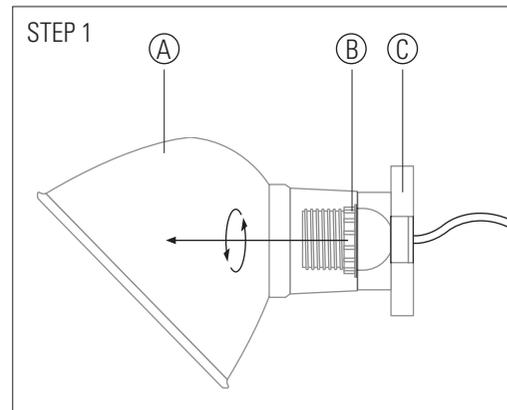

### Key

- |              |                   |               |
|--------------|-------------------|---------------|
| A Shade      | D Fixing Bracket  | G Main Supply |
| B Shade ring | E Fixing screws   | H Lampholder  |
| C Backplate  | F Connector block |               |

### Adjusting Shade

The shade can be rotated on its base in either direction. The shade ring may require some loosening to enable desired rotation. Ensure power to the fitting has been turned off and the lamp left to cool before making any adjustments. Once shade is in desired position, tighten shade ring before restoring power.

