

**modo**

LUCE

# OTTOVOLANTE PLUS sospensione

## OTTOVOLANTE PLUS suspension

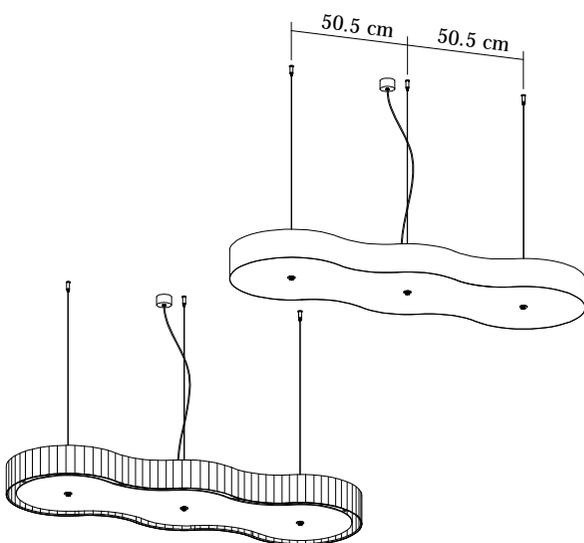


Fig. 1

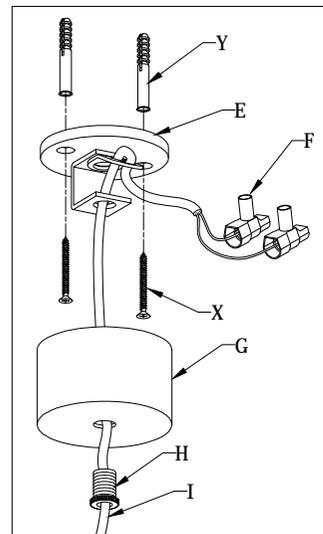
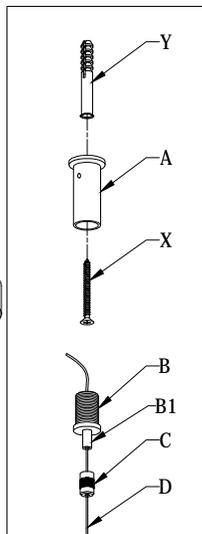


Fig. 2


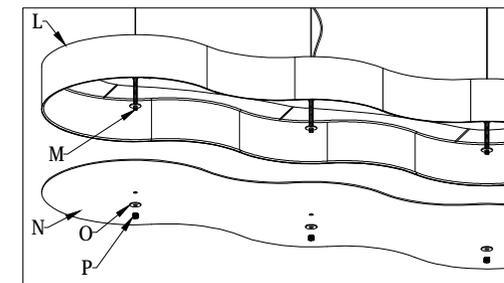

 VERSIONE DIMMERABILE  
 DIMMABLE VERSION Fig. 5


Fig. 4


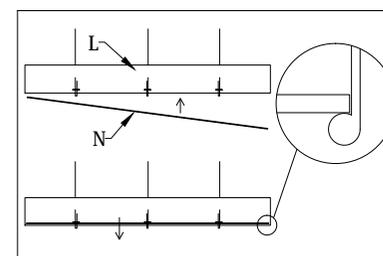


Fig. 3

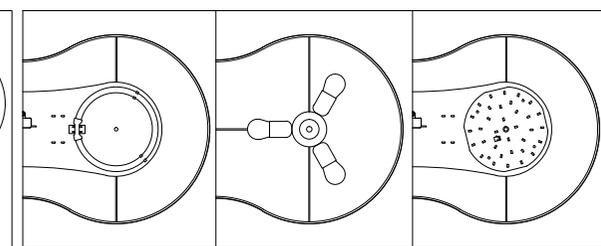

Circolina

Versione E27

LED

Fig. 6

**ISTRUZIONI DI MONTAGGIO**

- Staccare la corrente di alimentazione.
- Fissare a soffitto i particolari (A) con le apposite viti (X) e tasselli (Y) (Fig. 1).
- Avvitare il particolare (B) al particolare (A). Per la regolazione del cavo d'acciaio (D), svitare la sicura (C) e tenendo premuto il pistoncino (B1) posizionare la lampada all'altezza desiderata, quindi rilasciare il pistoncino (B1) e richiudere la sicura (C) (Fig. 1).
- Fissare a soffitto il gruppo (E) con le apposite viti (X) e tasselli (Y) facendo prima passare nel foro centrale i cavi di rete (Fig. 2).
- Collegare i cavi di rete nei morsetti (F) rispettando le polarità.
- Posizionare il rosone (G) e chiudere il tutto avvitando il particolare (H).
- Avvitare ai portalampe le lampade secondo le versioni (Fig. 6).
- Posizionare il plex di chiusura inferiore (N) inserendolo all'interno del paralume (L) e appoggiandolo successivamente per caduta al bordo interno del paralume stesso (Fig. 3 - 4).

Attenzione: per la versione PLISSE' il plex non appoggia sul bordo interno ma rimane a circa 1cm dal bordo stesso.

- Fissare il plex (N) avvitando il particolare (P) e la rondella (O) al tubo filettato (M) (Fig. 4).

**VERSIONE DIMMERABILE**

- Appendere a soffitto il particolare (S) (Fig. 5).
- Effettuare i collegamenti rispettando le marcature, richiudere la scatola (T).
- Allentare le viti del bloccacavo (Q) e far scorrere il rosone (R) fino al completo appoggio a soffitto, richiudere la vite del bloccacavo (Q).

**ATTENZIONE**

Gli apparecchi di nostra costruzione sono idonei all'uso in ambienti ordinari con temperatura ambiente ad umidità relativa standard. Tutte le operazioni devono essere eseguite da un tecnico specializzato.

**PULIZIA**

**Staccare la corrente di alimentazione o la spina dalla presa.**

Per la pulizia periodica degli apparecchi di illuminazione usare sempre i guanti ed uno straccio morbido (in caso di superfici lisce) o un piumino del tipo con manico per la finitura in tessuto o plissé. Non usare mai solventi o alcool.

Evitare nel modo più assoluto di piegare parti non previste per la mobilità delle stesse, in quanto ciò potrebbe indebolirle o romperle.

**INSTRUCTION**

- Switch off the power or pull the plug out.
- Fix on the ceiling the details (A) with the screws (X) and the dowels (Y) (Fig. 1).
- Screw the detail (B) to the detail (A). Regulate the steel cable (D) by unscrewing the safety (C) and pressing the little piston (B1) and place the lamp at the wanted height, then release the little piston (B1) and close again the safety (C) (Fig. 1).
- Pull the network cable through the center hole of the disc (E) and fix on the ceiling the disc with the screws (X) and the dowels (Y) (Fig. 2).
- Connect the network cable on the clamp (F) according to the polarity.
- Lift up the ceiling rose (G) until it completely leans against the ceiling; screw the detail (H) (Fig. 2).
- Insert the lamp on the lamp sockets as version (Fig. 6).
- Insert the plexiglass finishing panel (N) inside the lamp shade (L) and then lean it by fall on the border of the lampshade (Fig. 3 - 4).

Attention: in the pleated fabric version the plexiglass doesn't lean on the external border, but it stays 1 cm from the border.

- Attach the plex (N) by turning the handle (P) and the washer (O) at the threaded pipe (M) (Fig. 4).

**DIMMABLE VERSION**

- Fix on the ceiling the detail (S) (Fig. 5).
- Connect the network cable on the clamp (T) according to the polarity.
- Unscrew the detail (Q) and lift up the ceiling rose (R) until it completely leans against the ceiling; screw the detail (Q) (Fig. 4).

**ATTENTION:**

The products of our production are suitable for the using in usual surroundings with standard temperature and humidity levels. All the operations have to be done by a technician.

**CLEANING:**

**Switch off the power or pull the plug out.**

For the periodical cleaning of the lamp use always gloves and a soft cloth (for glossy surfaces) or a feather duster for the lampshade in fabric or pleated fabric.

Don't use aggressive solvents or alcohol.

Avoid absolutely to fold parts which are not expected for folding, in this case welded parts are going to be damaged.



8 x max 42W E27 HES



3 x 22W 2GX13 T5 circolina



3 x 18W LED 3000K