


These instructions are provided for your safety in order to prevent the risk of Fire, Electric shock or Injury. It is vitally important that they are read in their entirety before installing your fitting. Please retain for future reference.

1. If you are in any doubt consult a qualified electrician as to the installation of the fitting. Install in accordance with current IEE wiring regulations. It is recommended that this fitting is installed by a qualified electrician.
2. Ensure that the electrical supply is OFF. Disconnect the electrical supply at the fuse-board.
3. If removing an existing fitting first, note all wiring connections: record which of the house wires is connected to the live, neutral and earth terminals.
4. Carefully identify where the supply cable is (and check there are no other cables in the area) to avoid damage to concealed wiring during installation.
5. Position the light where desired ensuring that there is suitable support adjacent to where you will connect to the house supply and mark position of fixing holes, before drilling appropriate holes as below.
 - a. Brick or masonry: Drill holes into which the wall plugs tightly fit, then insert wall plugs.
 - b. Wood: No hole necessary (unless small pilot hole required), screws can be screwed directly into the timber.
 - c. Plaster/Cavity: Special cavity wall fittings are required, rather than provided fixings. These are widely available from good hardware or DIY store and should come with their own instructions that must be followed. It may be easier to relocate the fitting so that you screw directly into a timber joist or beam.
7. Support the fitting so that no strain is applied to the wiring when making the electrical connections. If necessary get a colleague to help.
8. Electrical connection: this light fitting must be earthed. Make connections following the diagram below. A small flat-head screwdriver is required.

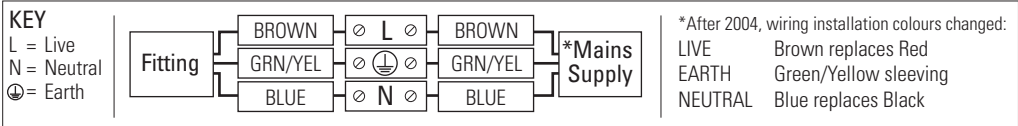


9. Double check all the connections are secure and that no loose strands of wire are left out of the connector. Ensure the lid of the terminal block is closed securely after making the connections.
10. Check that no wires are trapped behind or within the fitting and complete the installation, referring to the installation diagram inside.
11. Fit the correct type and wattage of lamp (or less). Be careful not to overtighten the lamp.
12. Switch on at the fuse-board. Your light fitting is now ready for use.

Other Important Information

Switch off at mains before changing lamp(s). Never fit a lamp of greater wattage than recommended. Ensure children do not play with the light fitting. Dispose of old lamps carefully. Never leave a fitting without a lamp in position (or someone can accidentally touch the contacts). Adjust fitting only when power to the fitting is off and has been left to cool. If the external flexible cord of this luminaire is damaged it shall exclusively be replaced by the manufacturer or his service agent, or a similar suitably qualified person in order to avoid a hazard. For use in dry, indoor environment only. Ensure the fitting does not come into contact with any liquids.




Cleaning and Maintenance

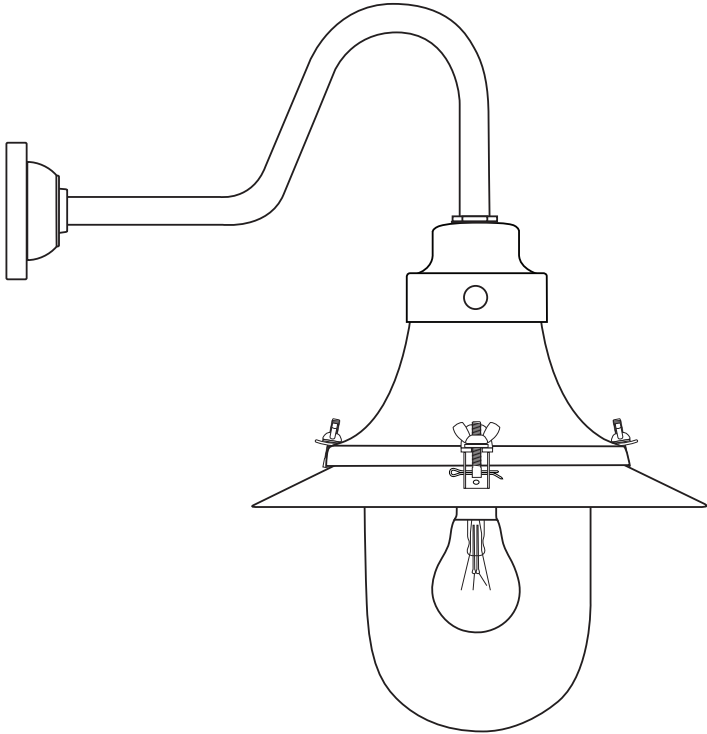Metal finishes should only be cleaned with a soft, dry cloth. Do not use polishes or abrasives. Glass can be cleaned by hand, using a soft damp cloth with a diluted mild detergent (nonabrasive) or suitable glass cleaner if necessary. Switch off power to the fitting before cleaning. Spare parts are available for this product, please contact us on the details below.



Small Decklight 7125/SN


| 230V ac 50Hz | IP20

LAMP GUIDANCE				
BASE	SHAPE		TYPE*	WATTAGE**
 E27	 GLS	 BALL	INCANDESCENT	✓
			CFL	✓
			ECO-HALOGEN	✓
			LED	✓
				100W MAX
				20W
				70W
				18W

* Warm white (2700k) low energy lamps recommended.

** Wattage value provided as a guide to suitable lamps. Lower wattage than stated may be used.

Contents

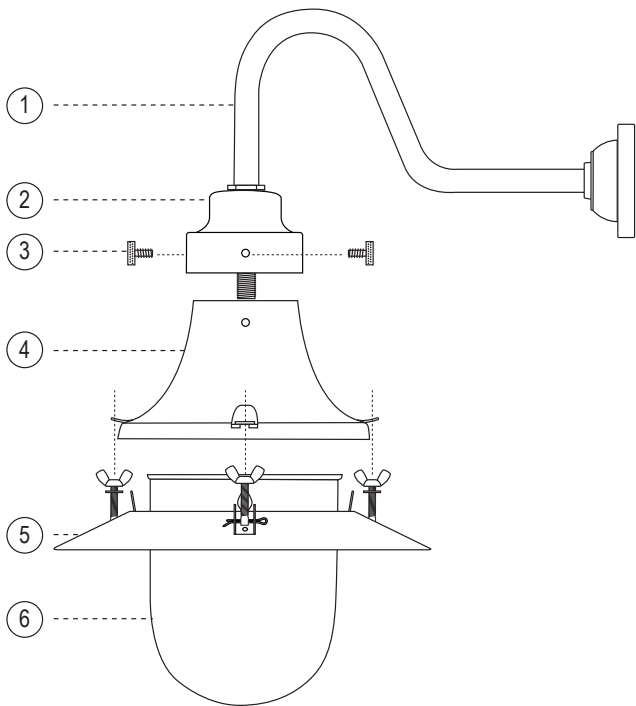


Contents

- 1 - Arm Assembly
- 2 - Top Spinning
- 3 - 3 x Gallery Screws
- 4 - Middle Spinning
- 5 - Reflector
- 6 - Well Glass
- 7 - 4 x Fixing Screws
- 8 - 4 x Rawl Plugs
- 9 - Connector Block


Required for Installation

- Screwdriver, flat-head
- Small screwdriver, flat-head
- Drill (if holes are required)

Reflector Diagram



- a - Tabs
- b - Reflector
- c - Well Glass

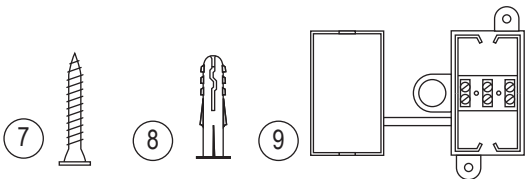

PLEASE READ THE INSTRUCTIONS ON THE REVERSE BEFORE YOU BEGIN INSTALLING YOUR LIGHT

Installation and Assembly Instructions


Check that the middle spinning(4) is connected to the top spinning(2). If it isn't, use the three gallery screws(3) to attach the middle to the top spinning- lining up the holes on each.

Place well glass through the hole in the reflector,

- Secure glass in place by folding metal tabs (on the inside of the reflector) over the top of the glass rim.
- Having inserted a bulb, use the wing nuts connected to the bolts to attach the reflector to the metal tabs protruding from the middle spinning and secure by tightening once in place.

To change light bulb, loosen two of the wing nuts- leaving the third one to act as a hinge and open the relector/glass enough to allow the old bulb to removed and the new one to be inserted. Close the reflector/glass and tighten the wing nuts to secure.

Installation Diagram

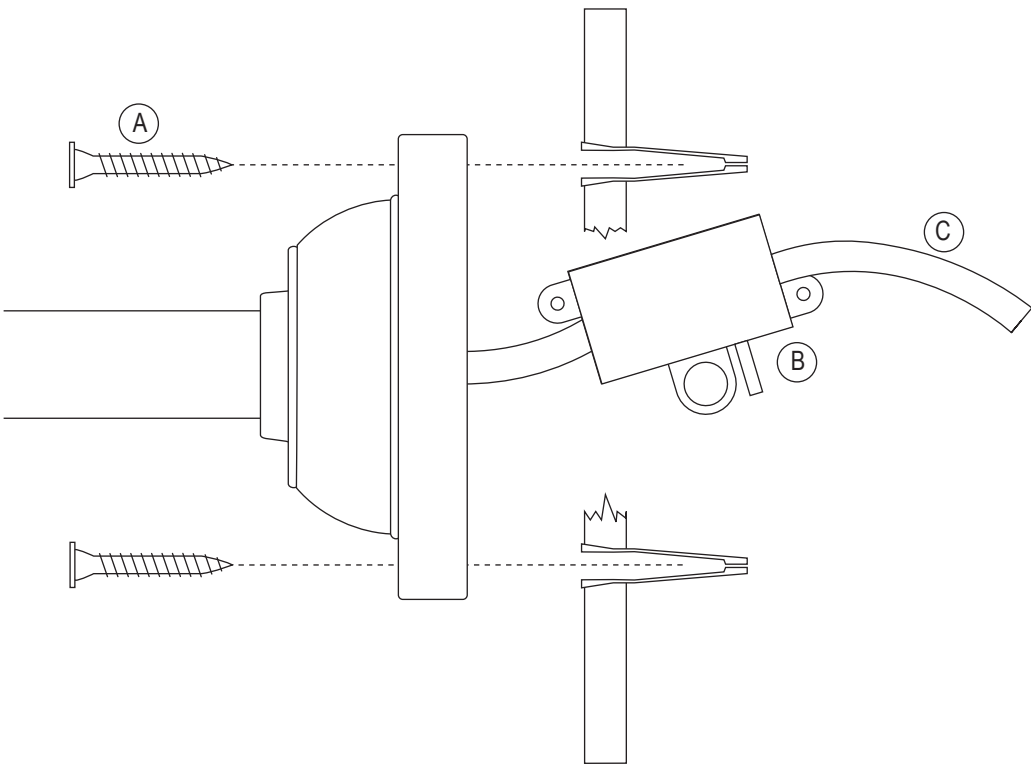

Key

- A Fixing Screws
- B Connector Block
- C Main Supply