


Safety & Installation Instructions

v1.1-05.25

These instructions are provided for your safety in order to prevent the risk of Fire, Electric shock or Injury. It is vitally important that they are read in their entirety before installing your fitting. Please retain for future reference.

1. If you are in any doubt consult a qualified electrician as to the installation of the fitting. Install in accordance with current IEE wiring regulations. It is recommended that this fitting is installed by a qualified electrician.
2. Ensure that the electrical supply is OFF. Disconnect the electrical supply at the fuse-board.
3. If removing an existing fitting first, note all wiring connections: record which of the house wires is connected to the live, neutral and earth terminals.
4. Carefully identify where the supply cable is (and check there are no other cables in the area) to avoid damage to concealed wiring during installation.
5. Position the light where desired, ensuring that there is suitable support adjacent to where you will connect to the house supply and mark the positions of the fixing holes, before drilling appropriate holes as below:
6. a. Brick or masonry: Drill holes into which the wall plugs tightly fit, then insert wall plugs.
b. Wood: No hole necessary (unless small pilot hole required), screws can be screwed directly into the timber.
c. Plaster/Cavity: Special cavity wall fittings are required, rather than provided fixings. These are widely available from good hardware or DIY stores and should come with their own instructions that must be followed. It may be easier to relocate the fitting so that you screw directly into a timber joist or beam.
7. Support the fitting so that no strain is applied to the wiring when making the electrical connections.
8. Electrical connection - this light fitting must be earthed. Make connections following the diagrams below & inside:

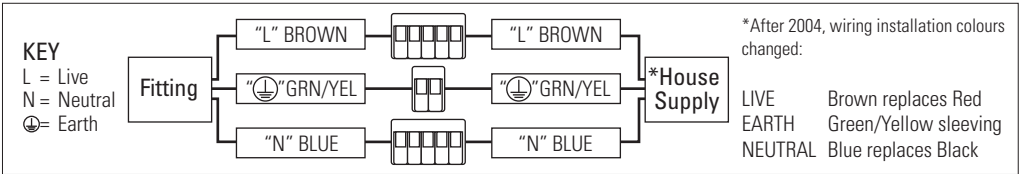

9. Double check all the connections are secure and that no loose strands of wire are left out of the terminal blocks.
10. Check that no wires are trapped behind or within the fitting and complete the installation, referring to the installation diagram inside.
11. Fit the correct type and wattage of lamp (or less). Be careful not to overtighten the lamp.
12. Switch on at the fuse-board. Your light fitting is now ready for use.

Other Important Information

Switch off at mains before changing lamp(s). Never fit a lamp of greater wattage than recommended. Ensure children do not play with the light fitting. Dispose of old lamps carefully. Never leave a fitting without a lamp in position (or someone can accidentally touch the contacts). Adjust fitting only when power to the fitting is off and has been left to cool. If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard. For use in dry, indoor environment only. Ensure the fitting does not come into contact with any liquids.

Cleaning & Maintenance

Metal finishes should only be cleaned with a soft, dry cloth. Do not use polishes or abrasives. Bone china can be cleaned with a soft damp cloth, or with a diluted mild (non-abrasive) detergent, if necessary. Switch off power to the fitting before cleaning. Spare parts are available for this product, please contact us on the details below.


Established in 1990, Original BTC manufactures relaxed, familiar lighting for traditional and contemporary homes. All products are hand-assembled in Oxfordshire from high quality components, produced in the UK.

ORIGINALBTC.COM
+44 (0)1993 882 251
UNIT 21 / 22 AVENUE ONE, STATION LANE, WITNEY, OX28 4XZ, ENGLAND



Fin Pendant Groupings of 12 & 18

Instruction Manual


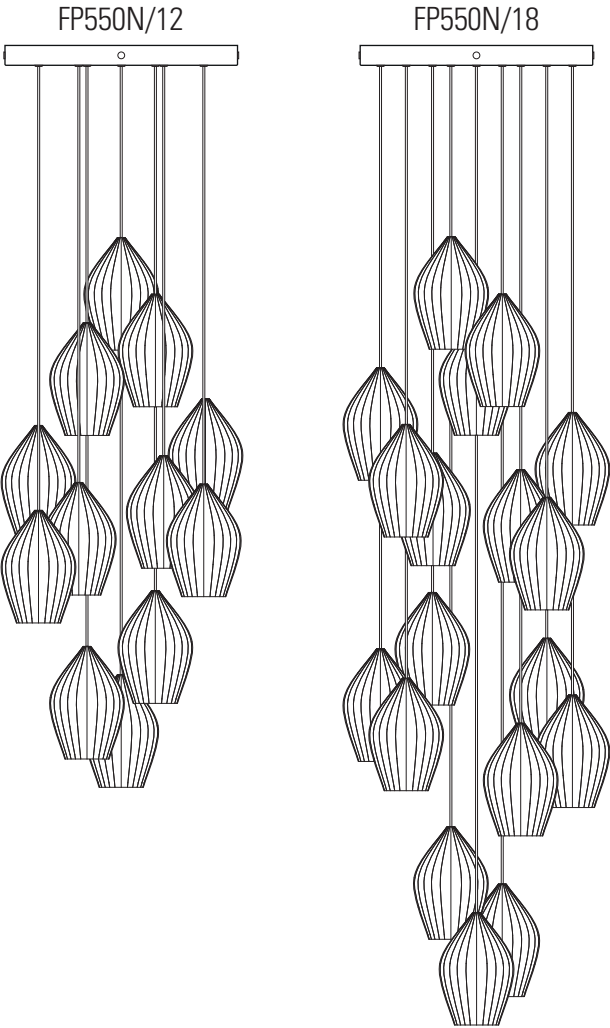


ORIGINAL BTC

Installation Diagram & Instructions

FP550N/18 Fin Pendant Grouping of 18

Cable Preparation & Wiring - Prepare cables as shown for fitting (below left) and house supply (below right)

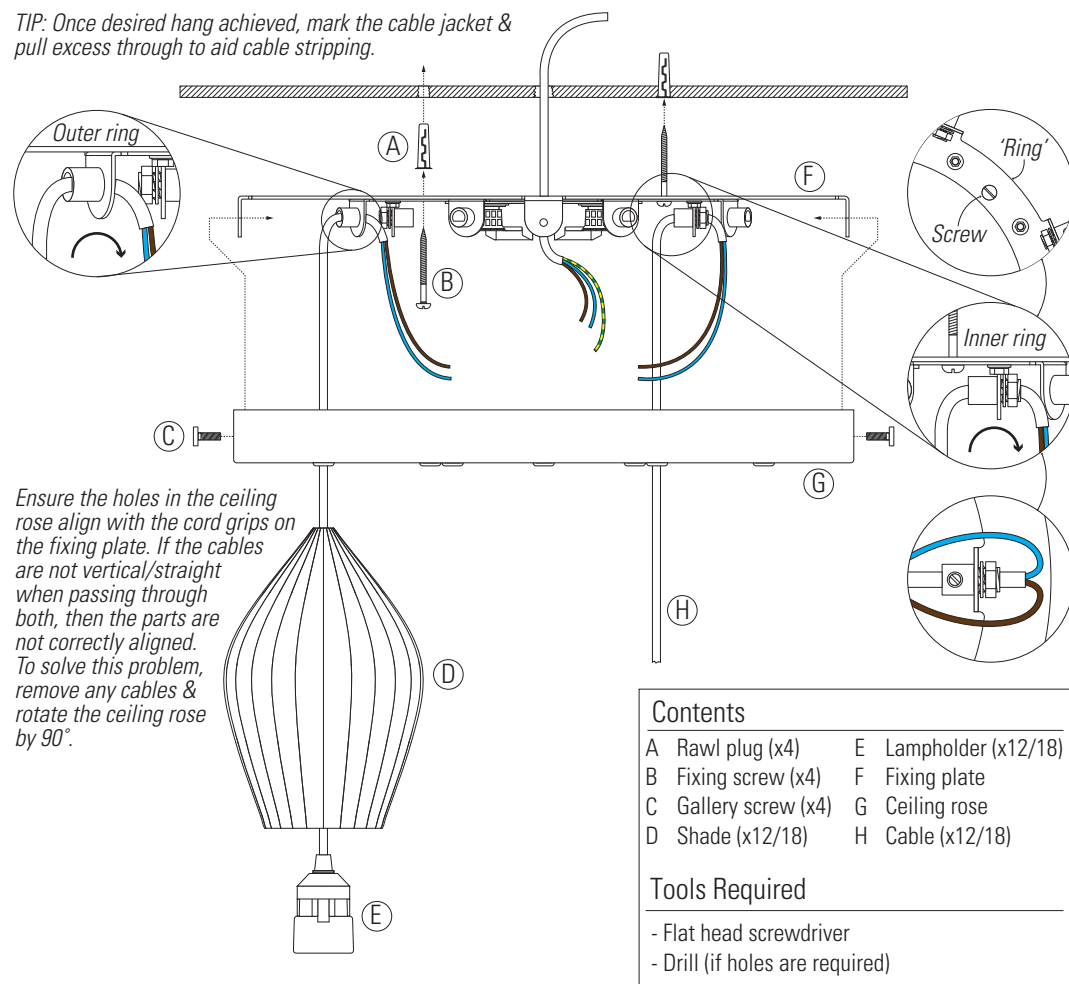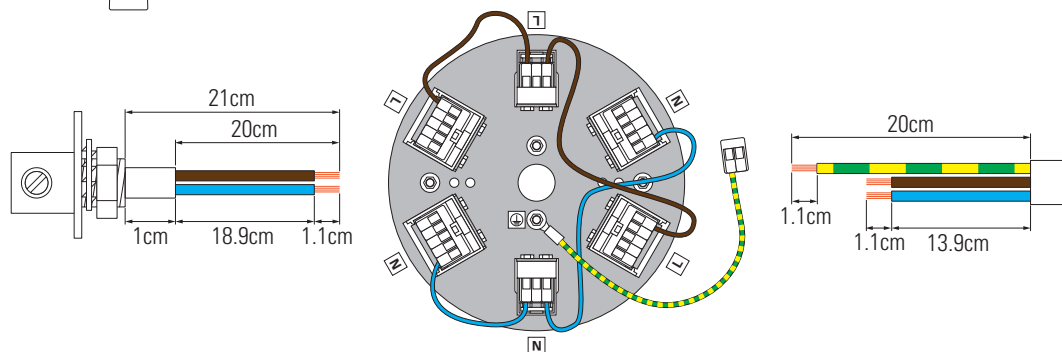

Ensure the holes in the ceiling rose align with the cord grips on the fixing plate. If the cables are not vertical/straight when passing through both, then the parts are not correctly aligned. To solve this problem, remove any cables & rotate the ceiling rose by 90°.

This fitting is **HEAVY**. Ensure there is adequate support available for the fitting. We advise installation is performed by a qualified electrician. Please read all the instructions, including those on the back page, before starting any work.

STEP 1 - Secure fixing plate (F) to the ceiling using the fixings provided, or other suitable means as described in point 6 on the back page. The fixing screws (B) should pass through the 'ring' section of the fixing plate where possible.

STEP 2 - Feed the cables (H) through the shades (D) then the ceiling rose (G). Feed the cables through the cord grips on the fixing plate (F). The cables **ALWAYS** pass through the grub screw end first - this means the cables from the 'inner ring' loop **BACK** towards the terminal blocks. Once you are satisfied with the hang of the shades, shorten the cables using the diagram opposite as a guide & tighten the grub screws. Do not overtighten the grub screws.

STEP 3 - Make the connections to the terminal blocks. See wiring guide on the opposite & back page.

STEP 4 - Secure the ceiling rose (G) to the fixing plate (F) using the gallery screws (C).