


Stirrup Floor Lights

FF523 - FF524 - FF079 - FF484

Instruction Manual

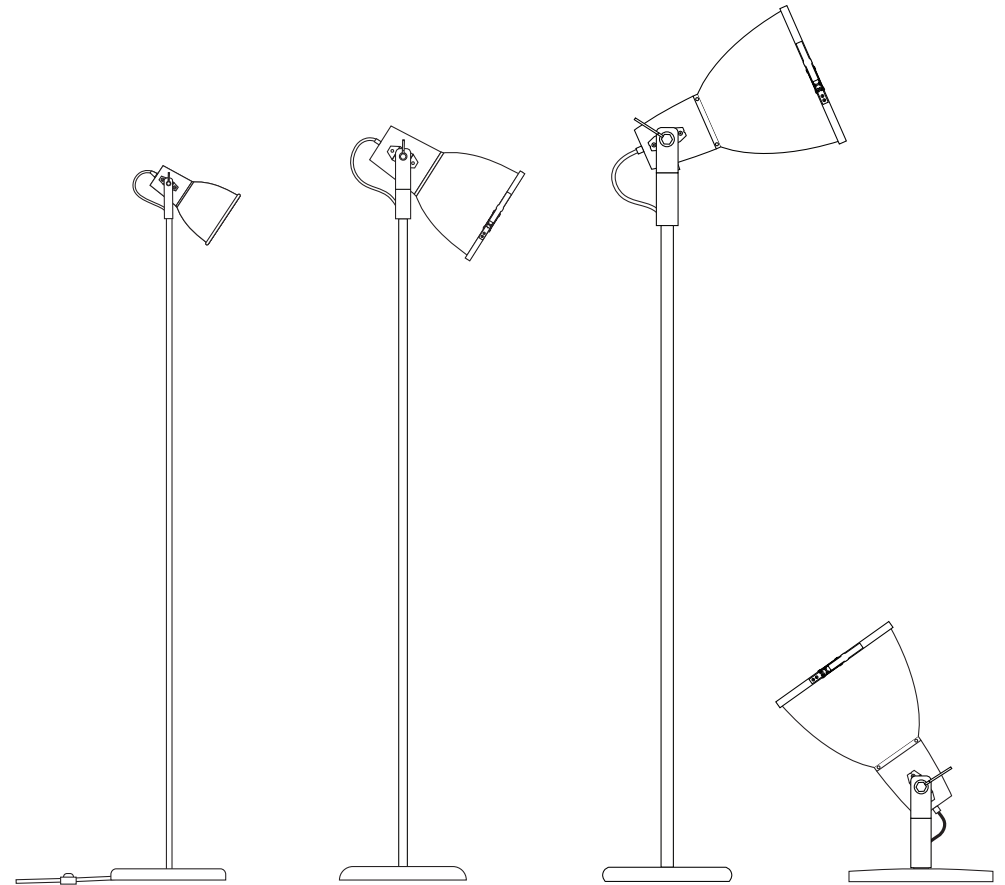

Stirrup 1 Floor Light,
FF523

Stirrup 2 Floor Light,
with Etched Glass
FF524

Stirrup 3 Floor Light
with Etched Glass
FF079

Stirrup 3 Uplighter
with Etched Glass
FF484

Established in 1990, Original BTC manufactures relaxed, familiar lighting for traditional and contemporary homes. All products are hand-assembled in Oxford from high quality components, produced in the UK.

ORIGINALBTC.COM
+44 (0)1993 882 251
UNIT 21 / 22 AVENUE ONE, STATION LANE, WITNEY, OX28 4XZ, ENGLAND






ORIGINAL BTC
BRITISH LIGHTING MANUFACTURERS
LONDON - NEW YORK - PARIS



Stirrup Floor Lights

| 230V ac 50Hz | IP20 |

- FF523 Stirrup 1 Floor Light
- FF524 Stirrup 2 Floor Light, with Etched Glass
- FF079 Stirrup 3 Floor Light with Etched Glass
- FF484 Stirrup 3 Uplighter with Etched Glass


LAMP GUIDANCE			WATTAGE**		
BASE	SHAPE	TYPE*	FF523	FF524	FF079 & FF484
		INCANDESCENT ✓	40W MAX	60W MAX	100W MAX
		CFL ✓	11W	15W	20W
		ECO-HALOGEN ✓	28W	n/a	n/a
		LED ✓	7W	12W	18W

* Warm white (2700k) low energy lamps recommended.
 ** Wattage value provided as a guide to suitable lamps. Lower wattage than stated may be used.

Visor Instructions (Stirrup Size 2, 3 and Uplighter)

Stirrup Size 2, 3 and uplighter are supplied fitted with an etched glass visor. Prior to installation and re-lamping, this should be removed:

- Remove tab (a) from clip (d).
- Whilst supporting the glass (c) with one hand, undo clip to remove glass.
- Hold the glass in place against the opening of the reflector (b),
- Close the clip to close the visor band (e) around the rim of the reflector and the underside of the glass, so the visor band supports the glass. Make sure the band secures only around the rim as it could mark the shade if lined up incorrectly.
- Insert tab into clip, bending top and bottom around clip to hold visor band securely to the reflector.

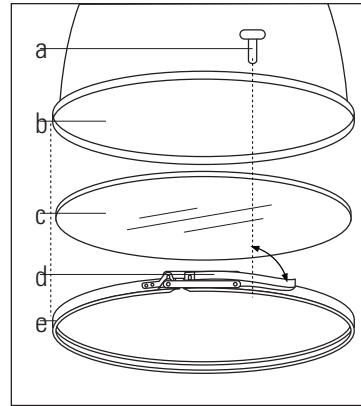

Safety Instructions

These instructions are provided for your safety in order to prevent the risk of Fire, Electric shock or Injury. Please retain for future reference. When fitting is in operation, some parts will become hot; take care when using/handling.

- Ensure the lamp type and max wattage is followed- do not exceed. Take care not to overtighten lamp.
- Do not touch the lamp (bulb) or lamp holder while in operation, as both become very hot.
- Turn off and unplug fitting, leaving lamp to cool before changing lamp. Dispose of old lamps carefully.
- Never leave a fitting without a lamp in position.
- Keep light fitting away from combustible materials such as soft furnishings.
- Ensure children do not play with the light fitting.
- Ensure the light is positioned on a solid, level and non-slip surface and make sure the position of the cable does not pose a trip hazard.
- If the electrical flex or electrical components become damaged at any point, the fitting must be unplugged from the power supply immediately and not operated until the damaged parts are fixed/replaced.
- For use in a dry, indoor environment only. Ensure the fitting does not come into contact with any liquids.

Cleaning and Maintenance

Metal finishes should only be cleaned with a soft, dry cloth. Do not use polishes or abrasives. Bone china can be cleaned using a soft damp cloth with a mild detergent if necessary. Switch off power to the fitting before cleaning. Spare parts are available for this product, please see contact details on the reverse.